

Figure 1

BEST AVAILABLE COPY

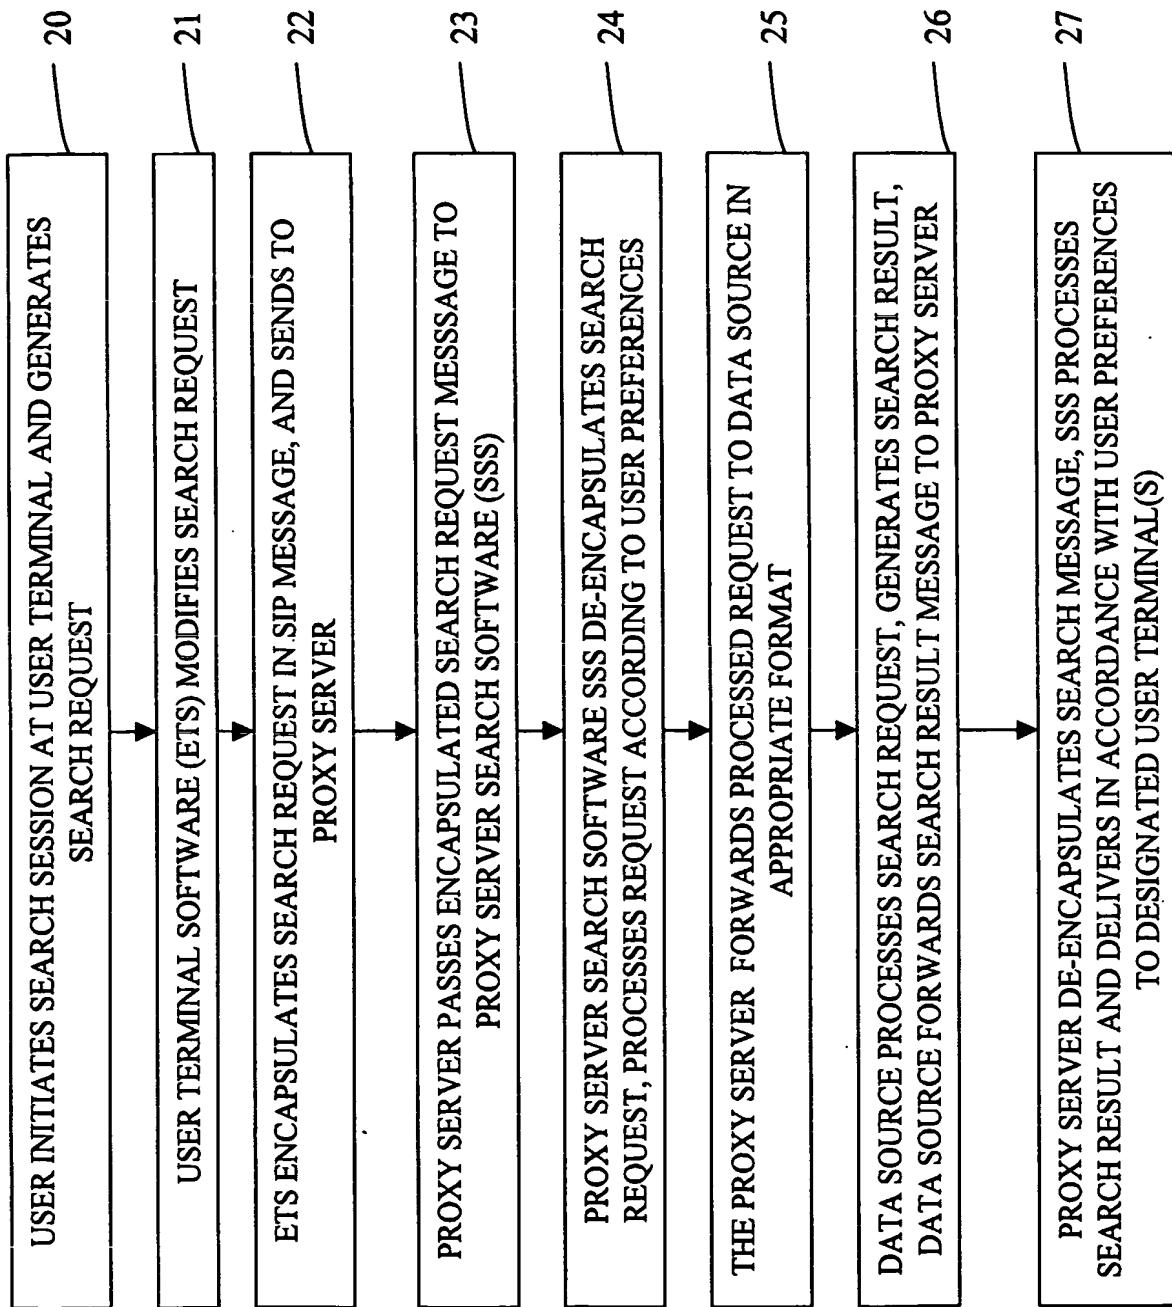


Figure 2

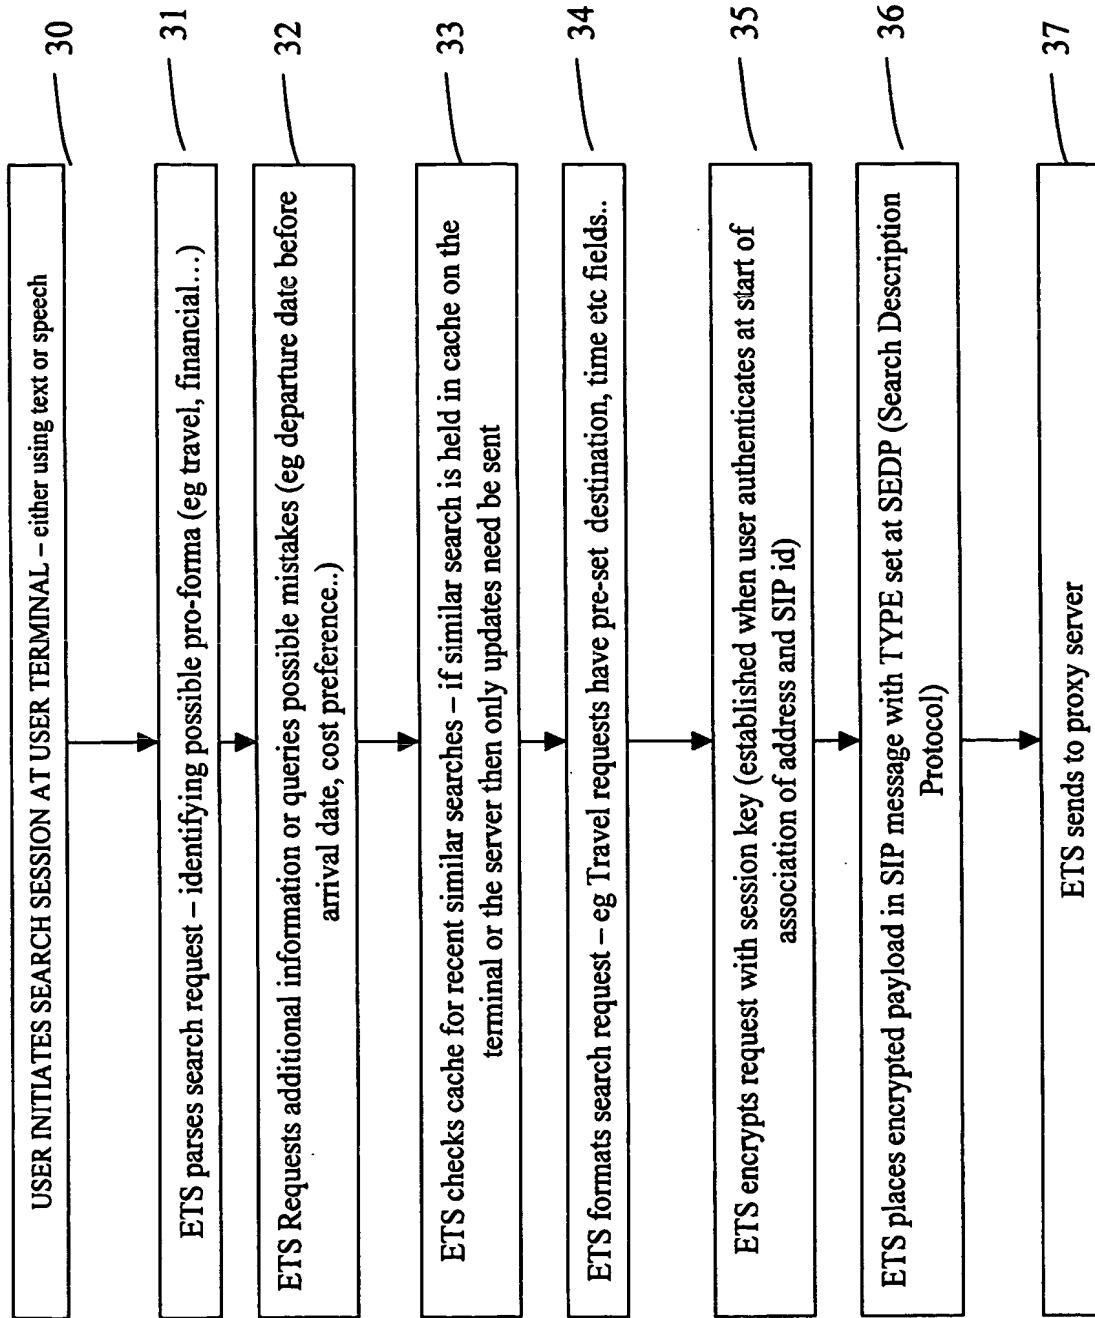


Figure 3

SIP header

```
INVITE sip:search@bt.co.uk SIP/2.0
Via: SIP/2.0/UDP spain.tel:5060
From: joe.bloggs <sip:joe @atelco.net>
To: Search <sip: Sea@uk.net>
Call-ID: 10000001@atelco .net
CSeq: 1 INVITE
Subject: Urgent search
Contact: Joe Bloggs <sip:joe @atelco .net>
Content-Type: application/SEDP
Content-Length: 160
```

SEDP Search description

```
Type = Travel.air
F=Luton;13,4,04; d=Ulan Bator; 28,4,04;;
AP=british A, NOT Aeroflot, other
P=price
U=instant; update (phone1);
T=urgent
OS= Hotel, Car Hire, Insurance
Sid 6784^*jkkj84
```

Figure 4

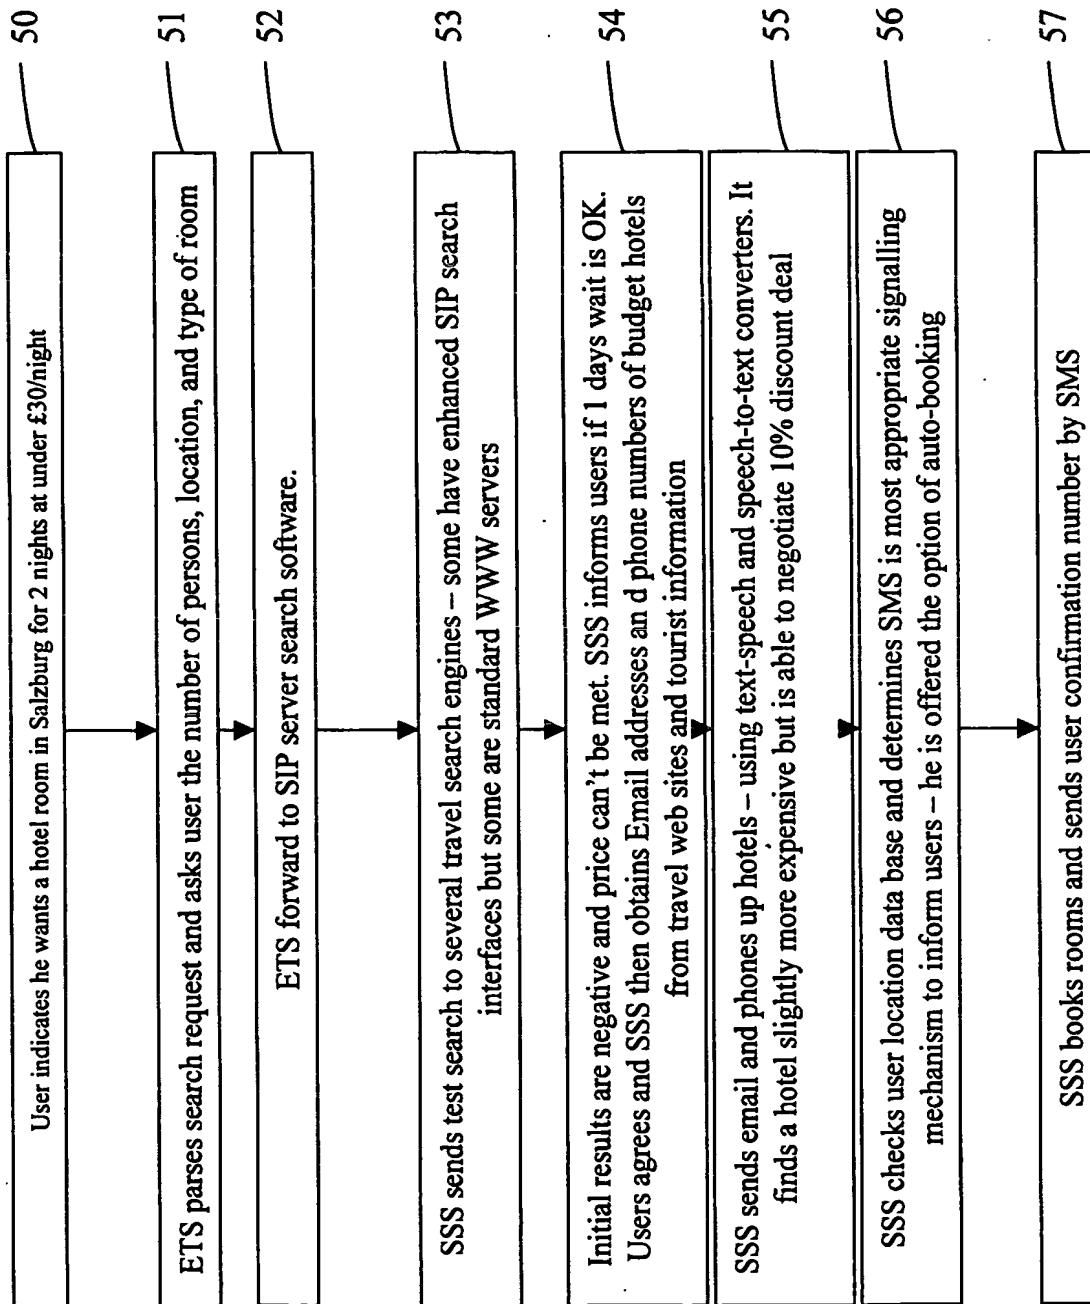


Figure 5

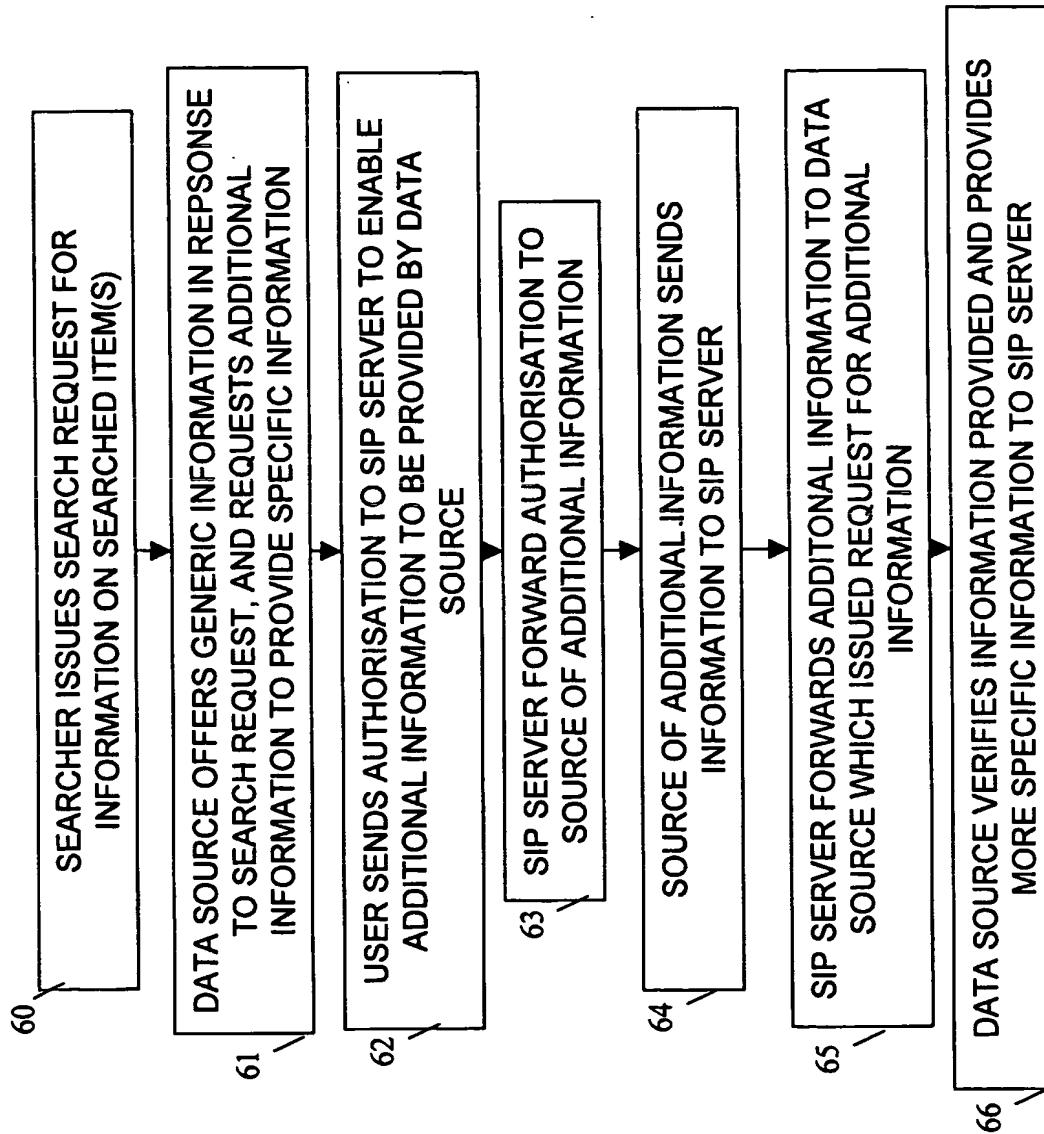


Figure 6

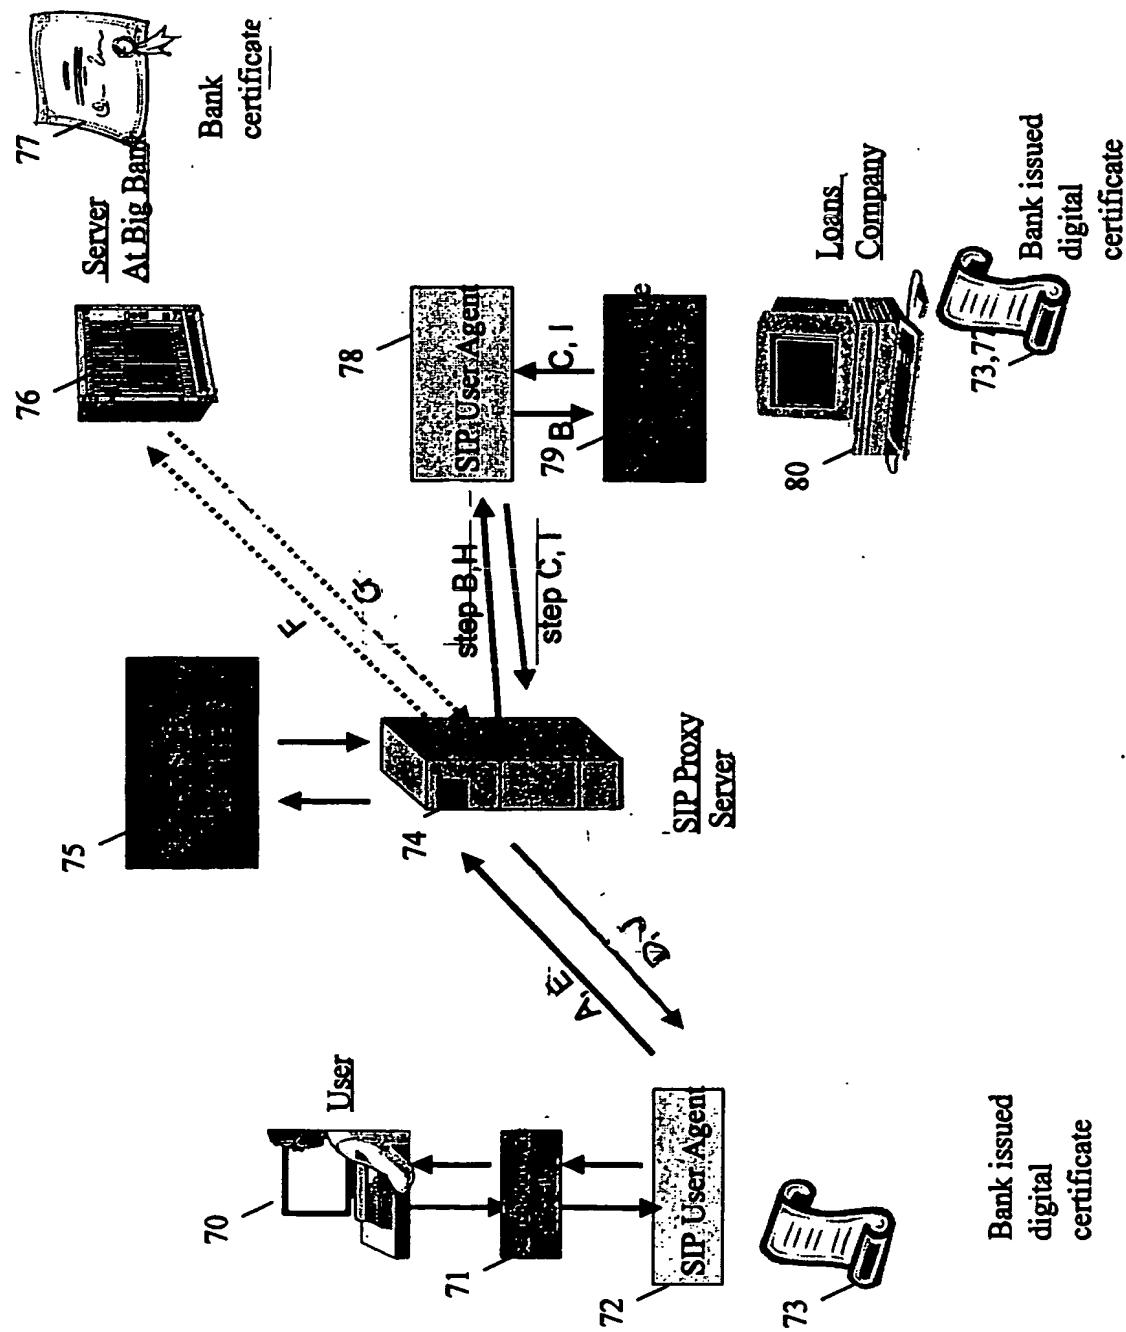


Figure 7

BEST AVAILABLE COPY

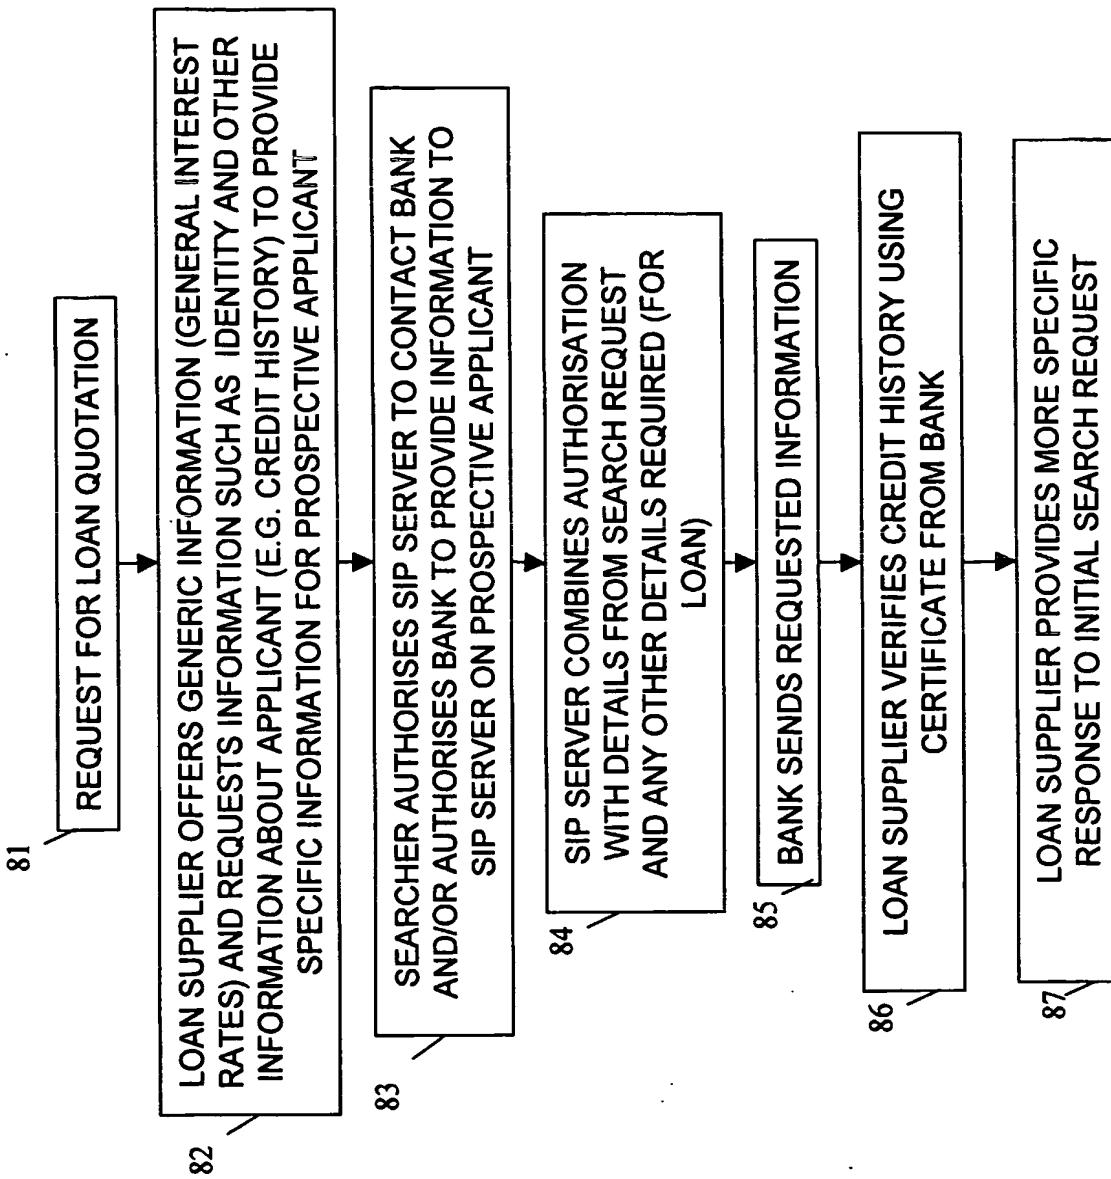


Figure 8